

# GRAS 40SA

探头传声器



Freq range: 2 Hz to 8 kHz  
Dyn range: 40 dB(A) to 166 dB  
Sensitivity: 3 mV/Pa

GRAS 40SA 探头传声器体积小、结构紧凑，适用于在小型机柜、恶劣环境和非常靠近声源的地方进行声压测量。探头顶端的高声输入阻抗将其对声场的影响降至最低，同时探头的不锈钢管可承受高达 800 °C 的温度。

## Typical applications and use

- Acoustic-impedance measurements
- Exhaust-system measurements
- Near-field measurements
- Measurements at high temperatures
- Pressure-distribution measurements in small enclosures

## Design

The GRAS 40SA is constructed with detachable stainless-steel probe tubes which guide the acoustic signal to a microphone inside the housing of the 40SA. After being sensed by the microphone, the acoustic signal is passed on to an impedance matching wave guide which eliminates unwanted internal reflections. The result is a smooth frequency-response ranging from 2 Hz up to 20 kHz. The internal microphone is connected to a low-noise preamplifier with a high dynamic range; ensuring a measurement range from approximately 40 dB to 166 dB re. 20  $\mu$ Pa. The data sheet shows the preamplifier's connections via its LEMO plug.

The GRAS 40SA Probe Microphone is internally compensated to equalize the internal pressure of the microphone with the static pressure at the probe's tip. The static pressure within the 40SA will therefore adjust itself to the static pressure existing at the probe's tip; which it does with a time constant of approximately 0.1 s.

The 40SA can be used with various probe lengths and is delivered with four standard probe lengths, i.e.: 20 mm, 40 mm, 80 mm and 160 mm. Intermediate lengths can be made by cutting these standard lengths. Also, the stainless steel tubes can be bent to a radius as low as 5 mm without downgrading the system's acoustics. A flexible probe tube is also provided for use in measurements where stiff stainless-steel tubes are not practical. This does, however, slightly downgrade the system's


acoustic performance.

The right angled design of the 40SA makes it particularly well suited for measurements on exhaust-gas systems and other machinery in general as well as for scanning vibrating surfaces such as loudspeaker diaphragms and cabinets.

The compact size, low weight and all-stainless-steel construction of the 40SA make it robust, easy to handle and easy to mount.

The 40SA is provided with a 3 m integrated cable with a 7-pin LEMO connector. Extensions cables are available.

Polarization/Connection		200 V / Traditional
Frequency range ( $\pm 3$ dB)	Hz	2 to 8 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	40
Dynamic range upper limit	dB	166
Set sensitivity @ 250 Hz ( $\pm 3$ dB)	mV/Pa	3
Polarization voltage	V	200 V
Power supply, single	V	120 to 28
IEC 61094-4 Compliance		WS3P
Output impedance	$\Omega$	55
Temperature range, operation	$^{\circ}\text{C} / ^{\circ}\text{F}$	-25 to 700 / -13 to 1292
Temperature range, storage	$^{\circ}\text{C} / ^{\circ}\text{F}$	-40 to 85 / -40 to 185
Temperature range with GRAS preamplifier, operation	$^{\circ}\text{C} / ^{\circ}\text{F}$	-25 to 70 / -13 to 158
Connector type		3 m 7-pin LEMO
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	40 / 1.4110

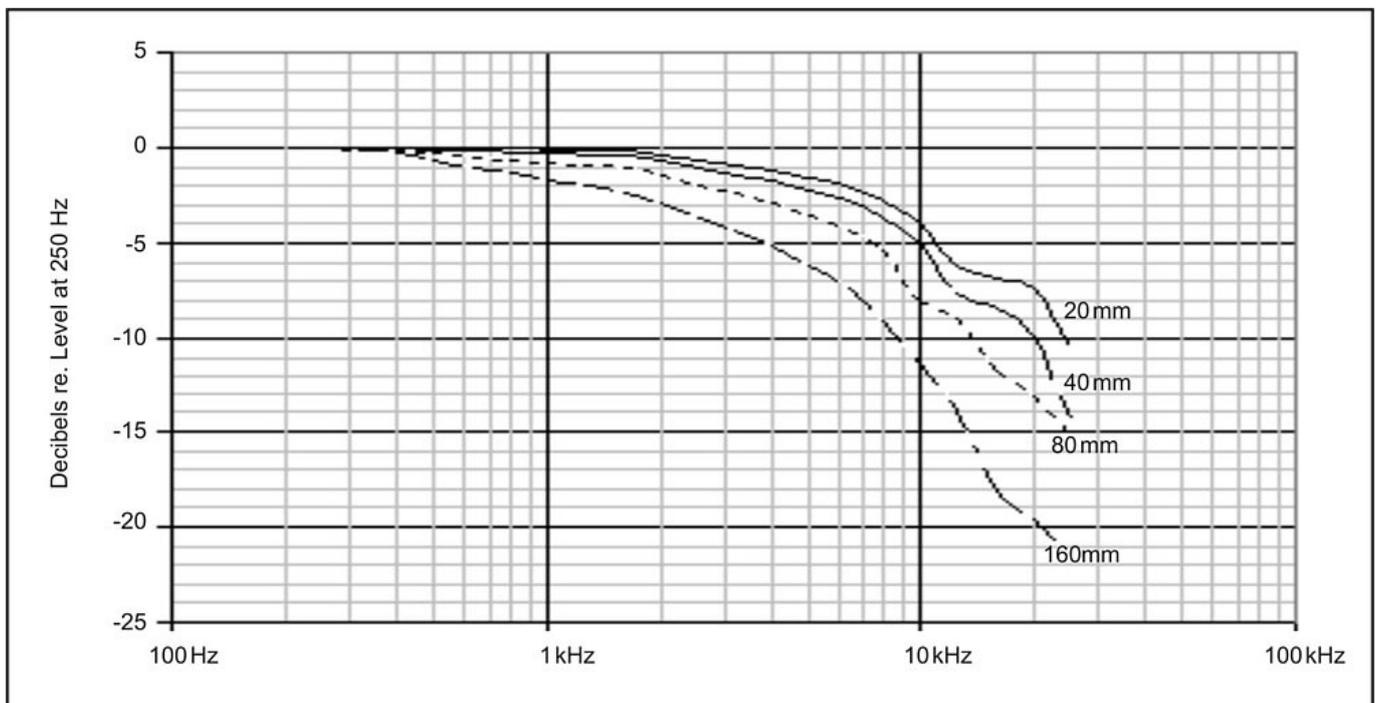

*Frequency response for various lengths of stainless-steel probes*

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Length (housing): 83.8 mm

Diameter: 12.7 mm

Probe tube outside diameter: 1.25 mm

Probe tube inside diameter: 1 mm

## Included items

GRAS GR0265	Pistonphone adapter for stainless steel probe
GRAS GR0266	Pistonphone adapter for flexible probe
GRAS GR0267	Heat sink and tool
GRAS RA0326	Calibration coupler
GRAS GR0263	1.3 mm insert pin for calibration coupler
GRAS GR0266	1.6 mm insert pin for calibration coupler
GRAS YY0004	Pair of pliers
GRAS YY0005	File
GRAS MI0016	Silicon grease
GRAS EK0018	Teflon tubing (L=0.5 m, Dia.: 1.6 mm)
GRAS GR0258	20 mm probe tube
GRAS GR0259	40 mm probe tube
GRAS GR0260	80 mm probe tube
GRAS GR0261	160 mm probe tube
GRAS GR0401	Flexible probe tube
GRAS SK5546	Needle for cleaning

## Optional items

<a href="#">GRAS AA0008</a>	3 m LEMO 7-pin - LEMO 7-pin Cable
<a href="#">GRAS 12AA</a>	2-Channel Power Module with gain, filters and SysCheck generator
<a href="#">GRAS 12AQ</a>	2-Channel Universal Power Module with signal conditioning and PC interface
<a href="#">GRAS 42AA</a>	Pistonphone, Class 1
<a href="#">GRAS 42AP</a>	Intelligent Pistonphone, Class 0

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

## HEAD OFFICE, DENMARK

**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

## USA

**GRAS SOUND & VIBRATION**  
9290 SW Nimbus Avenue  
Beaverton, OR 97008  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

## UK

**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0)7762 584 202  
[www.GRASacoustics.com](http://www.GRASacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

## CHINA

**GRAS SOUND & VIBRATION**  
Room 502, Building T1,  
No.1398 Ali Center  
Shenchang Road,  
Minhang District,  
Shanghai, China, 201107  
Tel: +86 21 400-888-9826  
[www.GRASacoustics.cn](http://www.GRASacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.GRASacoustics.com](http://www.GRASacoustics.com)

[www.GRASacoustics.com](http://www.GRASacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand