GRAS 40LA

1/4" CCP

GRAS 40LA 178 dB 70 kHz



GRAS

GRAS GRAS

GRAS GRAS

GRAS GRAS DANAK ISO 17025

gras/calib.

GRAS

5

GRAS




Specifications

Polarization/Connection		0 V / CCP
Frequency range (±1 dB)	Hz	10 to 20 k
Frequency range (±3 dB)	Hz	5 to 70 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	< 56
Dynamic range upper limit with GRAS CCP preamplifier	dB	178
Set sensitivity @ 250 Hz (±2 dB)	mV/Pa	0.5
Power supply (Constant Current Power)	mA	2 to 20
Microphone venting		Front
IEC 61094-4 Compliance		WS3P
Output impedance	Ω	<50
Temperature range, operation	°C / °F	-55 to 100 / -67 to 212
Temperature range, storage	°C / °F	-40 to 85 / -40 to 185
TEDS (IEEE 1451.4)		27 v. 1.0
Connector type		Microdot 10/32
CE/RoHS compliant/WEEE registered		Yes / Yes / Yes
Weight	g / oz	3 / 0.101




Specifications

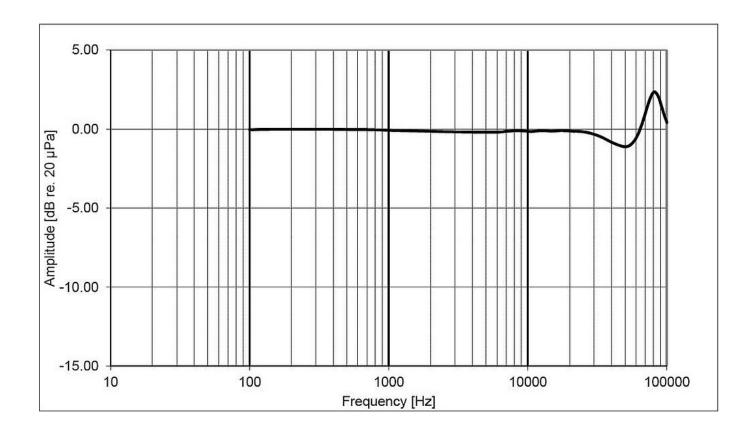

GRAS Sound & Vibration



Dimensions in mm



Included items

GRAS GR0933	Adhesive tape, pre-cut, single-sided
GRAS GR0934	Adhesive tape, pre-cut, double-sided
GRAS MI0031	Cleaning tissue
GRAS AE0046	Adapter, BNC male to Microdot female
GRAS GR1252	Silicon-rubber fairing

Optional items

GRAS 12AQ	Power Module (2-ch.)
GRAS 42AP	Intelligent Pistonphone with built-inprecision barometer (250 Hz or 251.2 Hz,114 dB ±0.05 dB) (recommended)
GRAS 42AA	Pistonphone(250 Hz, 114 dB ±0.08 dB)
GRAS GR1297	Aluminum fairing
<u>GRAS 0P0025</u>	Kit for Sensitivity Calibration of Surface Microphone Sets
<u>GRAS 0P0026</u>	Kit for Frequency Calibration of 1/4" Surface Microphone Sets
GRAS CA0029	Traceable Calibration of Microphone Set
GRAS CA2301	Accredited Calibration of Microphone Set

GRAS Sound & Vibration



GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK

GRAS SOUND & VIBRATION

Skovlytoften 33 2840 Holte Denmark Tel: +45 4566 4046 www.GRASacoustics.com gras@grasacoustics.com

USA

GRAS SOUND & VIBRATION

9290 SW Nimbus Avenue Beaverton, OR 97008 Tel: 503-627-0832 Toll Free: 800-231-7350 www.GRASacoustics.com sales-usa@grasacoustics.com

UK

GRAS SOUND & VIBRATION

Unit 115, Gibson House, Ermine Business Park, Huntingdon, Cambridgeshire, PE29 6XU Tel: +44 (0) 7762 584 202 www.GRASacoustics.com sales-uk@grasacoustics.com

CHINA

GRAS SOUND & VIBRATION

Room 315, RuiBo Center(T1) Lane683, Shenhong Rd, Minhang District, Shanghai, China, 201107 Tel: +86 21 64203370 www.GRASacoustics.cn cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

GRAS

An Axiometrix Solutions Brand

grasacoustics.com