

GRAS 146AE

1/2" CCP



Freq range: 3.15 Hz to 20 kHz
Dyn range: 18 dB(A) to 133 dB
Sensitivity: 50 mV/Pa
Temperature: -40 to +125°C
Humidity: 10 – 90%
IP67

GRAS 146AE	1/2"	BNC	-40
125°C	-	.	



GRAS 146AE



IEC 61094-4/WS2F

LED TEDS LED TEDS LED
146AE IP67

146AE GRAS 46AE -40 125°C



GRAS (HALT) NVH 8g 60
-40°C +125°C 150 100 100

IP67

146AE IP67



146AE NVH

-
-
-
-
- /CAE

-
-
-
-
- 125°C



GRAS 146AE 1/2" (CCP) CCP
CCP NVH

-
-
-
-
-
- IP67
- GRAS BNC IP67
-
- 146AE RA0357 10 kHz



GRAS 46AE IEC



IP55



GoPro™ Picatinny



146AE

5

-
-
-
- CCP



146AE BNC 4 mA

146AE IEEE 1451.4 TEDS v. 1.0



TEDS

GRAS 42AG

GRAS 42AP



www.grasacoustics.com/e-data

GRAS HALT

(HALT)

HALT



GRAS

GRAS GRAS

GRAS GRAS GRAS GRAS GRAS
GRAS GRAS GRAS GRAS GRAS
17025



Polarization/Connection		0 V / CCP
Frequency range (± 1 dB)	Hz	5 to 10 k
Frequency range (± 2 dB)	Hz	3.15 to 20 k
Dynamic range lower limit with GRAS preamplifier	dB(A)	18
Dynamic range upper limit with GRAS CCP preamplifier	dB	133
Set sensitivity @ 250 Hz (± 2 dB)	mV/Pa	50
Set sensitivity @ 250 Hz (± 2 dB)	dB re 1V/Pa	-26
Output impedance	Ω	< 50
Power supply min. to max.	mA	2 to 20
Output Voltage Swing, min. @ 28 V CCP voltage supply	Vp	8
DC bias voltage, typ.	V	16
Microphone venting		Rear
IEC 61094-4 Designation		WS2F
Temperature range, operation	$^{\circ}\text{C} / ^{\circ}\text{F}$	-40 to 125 / -40 to 257
IEC 61672 compliance		Class 1
Temperature range, storage	$^{\circ}\text{C} / ^{\circ}\text{F}$	-40 to 85 / -40 to 185
Temperature coefficient @250 Hz	dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$	0.01 / 0.006 (typically)
Static pressure coefficient @250 Hz	dB/kPa	-0.003
Humidity range non condensing	% RH	10 to 90
Influence of axial vibration @1 m/s ²	dB re 20 μPa	66
TEDS UDID (IEEE 1451.4)		I27-0-0-0U
Connector type		BNC
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	35 / 1.23
IP rating		IP67***
Influence of humidity @250 Hz (10 -90% RH)	dB	<-0.3

GRAS HALT Test Parameters*

Humidity 90%	@50°C	48 hours
Drop - horizontal orientation of microphone, attached to 2 kg load	m	1.5
Drop - vertical, grid downwards, attached to 2 kg load	m	1.5
Drop - tumbling 1 meter	times	100
Vibration - horizontal and vertical	@8g	60 hours
IP rating**		IP67***

* HALT "GRAS HALT "

** IEC 60529



***IP67 1

IP IEC 60529:2013 DELTA FORCE Technology Venlighedsvej 4, 2970 Hørsholm, Danmark
www.delta.dk



GRAS Sound & Vibration

Dimensions in mm

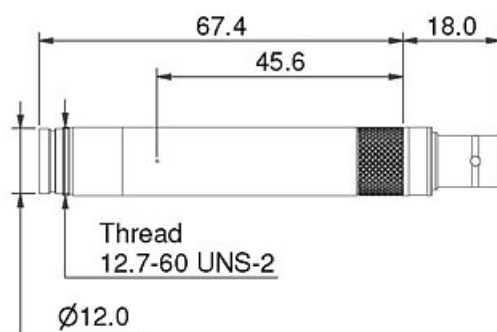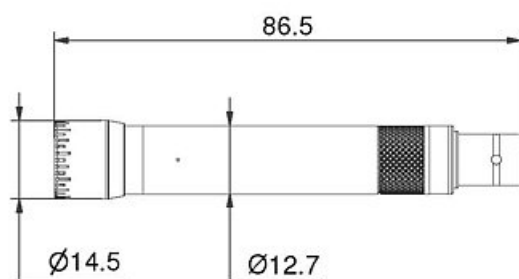

GS0847
146AE

Included items

GRAS RA0341	Calibration Adapter
-------------	---------------------

Optional items

GRAS RA0357	Random Incidence Corrector for 146AE
GRAS RA0504	GoPro adapter
GRAS RA0340	Dust, Oil and Water resistant protection grid
GRAS RA0354	Dust, Oil and Water resistant protection grid, package with 5 PCS
GRAS AM0391-1	High-Temperature Windscreen for 146AE, Click-Mount
GRAS AM0391-2	High-Temperature Windscreen for 146AE, Click-Mount, 5 pcs
GRAS AA0102	3 m BNC-BNC waterproof cable
GRAS AA0103	10 m waterproof BNC-BNC cable
GRAS AA0107	1 m waterproof/high temperature BNC-BNC cable
GRAS AA0108	3 m waterproof/high temperature BNC-BNC cable
GRAS AA0109	10 m waterproof/high temperature BNC-BNC cable
GRAS AA0110	30 m waterproof/high temperature BNC-BNC cable
GRAS CA2300	Accredited Calibration

GRAS Worldwide

Subsidiaries and distributors in more
than 40 countries

HEAD OFFICE, DENMARK
GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.GRASacoustics.com
gras@grasacoustics.com

USA
GRAS SOUND & VIBRATION
9290 SW Nimbus Avenue
Beaverton, OR 97008
Tel: 503-627-0832
Toll Free: 800-231-7350
www.GRASacoustics.com
sales-usa@grasacoustics.com

UK
GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0) 7762 584 202
www.GRASacoustics.com
sales-uk@grasacoustics.com

CHINA
GRAS SOUND & VIBRATION
Room 315, RuiBo Center(T1)
Lane683, Shenhong Rd,
Minhang District,
Shanghai, China, 201107
Tel: +86 21 64203370
www.GRASacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

grasacoustics.com

GRAS
An Axiometrix Solutions Brand